

**DS-KD-TDM
Modular Door Station**

- Touch display module with M1 card reader of modular door station
- 4-inch touch screen with rich information display: Dial number, pin code unlock, contact list, advertisement
- Store up to 2000 contacts
- IP65 and IK08 higher protection level
- Support multiple languages


▪ Specification

System parameters	
Operation system	Linux
ROM	32 MB
RAM	128 MB
Display parameters	
Screen size	4-inch
Type	IPS
Resolution	480 × 480
Brightness	Adjustable, Max.500 cd/m ²
Audio parameters	
Audio input	/
Audio compression standard	/
Audio output	1 buzzer
Audio quality	/
Volume adjustment	/
Loudspeaker consumption	/
Network parameters	
Wireless network	AP mode
Authentication	
Card reading frequency	13.56 MHz
Card reading distance	2 cm
Card type	M1 card
Device interfaces	
TF card	Reserved
DIP switch	8 bits
Two-wire cascading interface	2
General	
Installation	Flush mounting, surface mounting
Protective level	IP65, IK8
Working temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Working humidity	10% to 95% (no-condensing)
Dimension (W × H × D)	100 mm × 100 mm × 35 mm (3.94" × 3.94" × 1.38")
Power supply	12 VDC, supplied by the main module
Power consumption	≤ 4 W
Language	English, Arabic, European French, Russian, European Spanish, Latin American Spanish, Italian, German, Polish, Turkish, Portuguese, Brazilian Portuguese, Uzbek, Kazakh, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovenian, Slovak, Hebrew, Swedish, Finnish, Mongolian, Vietnamese, Traditional Chinese (Taiwan), Latin American Spanish

▪ Available Model

DS-KD-TDM

▪ Dimension

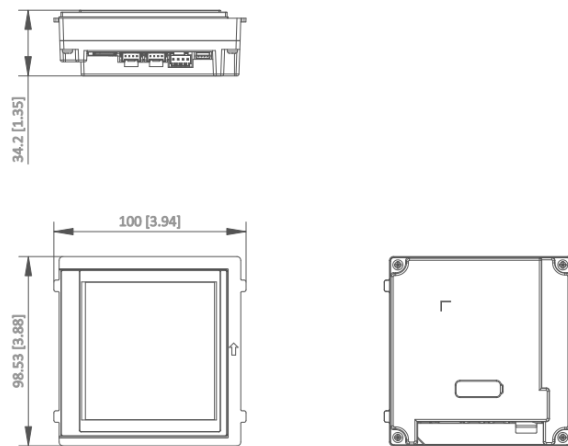

Unit:mm [inch]

SCALE 1:1

▪ **Accessory**

▪ **Optional**

DS-KD8003-IME1(B))	DS-KD8003-IME1(B)) /S	DS-KD8003-IME1(B)) /NS	DS-KD8003-IME1(B)) /Surface	DS-KD8003Y-IME2/ S
DS-KD8003Y-IME2/ NS	DS-KD8003Y-IME2	DS-KD-PMR	DS-KD7003EY-IME2	DS-KD7003EY-IME2 /Aluminum

See Far, Go Further



www.hikvision.com
support@hikvision.com

